

# Rebuild or Retool-Your Part Feeder

## Limited Capital Budget ? Rebuild It!



Tooling repaired or replaced.  
New Tooling for families of new parts

Spring Packs & Drives  
Rebuilt to Factory Spec.

Repair or Upgrade  
Controls


Brushlon surfaces replaced

Repair or Update Discharge  
Conveyor

Add drip pans, hoppers and  
Z,X and Y adjustors.

**Dyna-Slide**<sup>®</sup>

# Typical Horizontal Vibratory Feeder Rebuild:

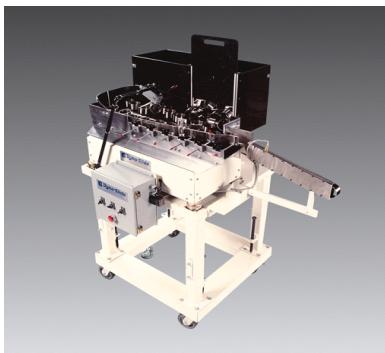

- Drives Bench Tested, Rebuilt as needed
- Feeder sub-frames repaired or replaced
- Springs replaced and Bolts replaced as needed
- Brush Replaced
- Machine plate and base cleaned and repainted
- Tooling repair or new tooling designed and installed for new parts

## BENEFITS TO REBUILDING YOUR HORIZONTAL FEEDER

- Return Feeder to Quiet operation- > 60 dba -Typical
- Return gentle handling characteristics to feeder
- Restore operating speeds to 0 to 320" / Min.
- Repair or update to quick change tooling to reduced set-up time or address new parts
- Change from Dry to Wet or Wet to Dry Operation
- Update Cell to incorporated intelligent bulk supply
- Increase Pre-Feeder Capacity
- Feeder can be easily reconfigured for new parts or changes in part geometry.
- Improved aesthetics

Standard Models	Dimensions	Part Range
F00929	9" x 29"	> 2"
F01436	14" X 36"	> 4.50"
F02148	21" X 48"	> 6"
F03054	30" X 54"	> 8"
F04166	41" X 66"	> 10"




Packaging



Machined Parts



Glass

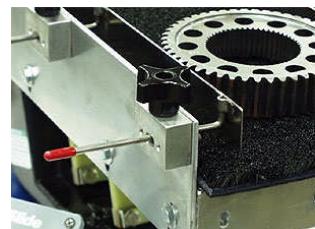

Powdered Metal