


Bulk Mover Conveyor-Sanitary Series

FEATURES :


- EZ Clean Hygienic Design
- Designed to exceed AMI-USDA Guidelines
- Engineering adaptations available
- USDA-FDA- Manual Clean Belts
- Wide Range Configurations including troughing belts in 5,15,20 and 30 degree.

BENEFITS:

- Quick Clean Features
- Eliminates belt tracking problems
- Easy to clean in place
- Endures wet, harsh environments
- Quiet - reducing noise in the plant
- Reduces power & environmental costs

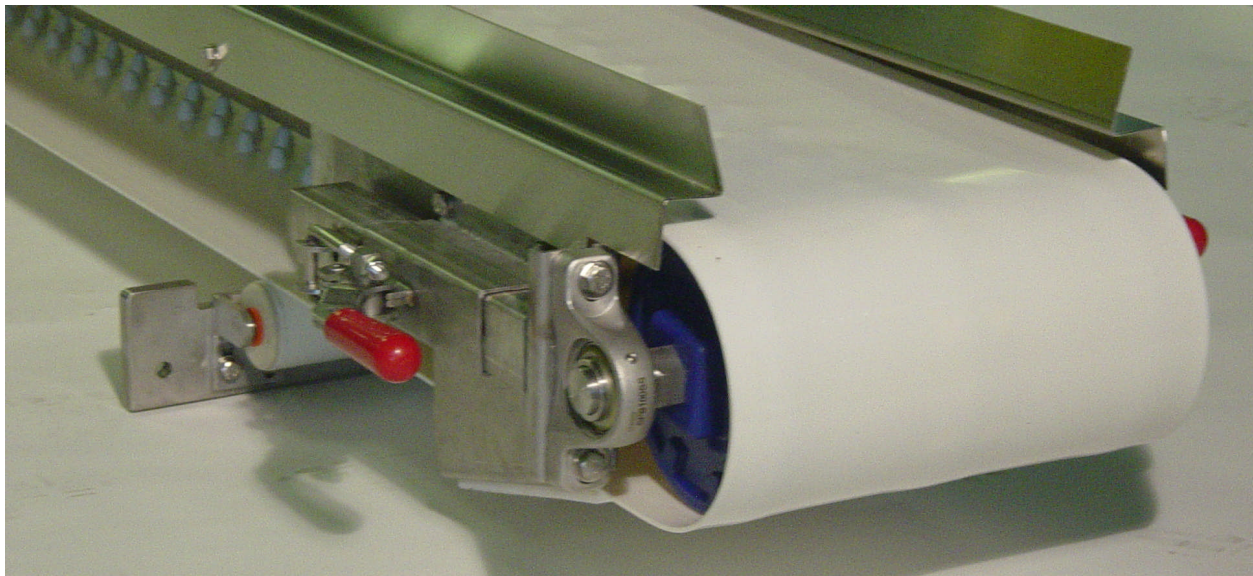


Conveyor Configurations		
General Bulk Handling	Horizontal Incline Z Incline Trough Belt 5/15/20/30 Degree	Bulk Feed Steep Incline Indexing
USDA-FDA Food Contact Applicaitons	Elevator Feeder Transfer Belt Belt Feeder	Dewater Sort Belt Grading
Packaging & Processing Appl.	Infeed Belts Merge/Diverge Feed Hopper	

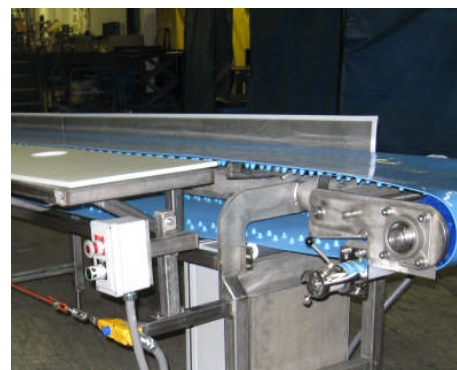

□ CDS LIPE * 7650 Edgecomb Drive * Liverpool, N.Y. 13088 * 800-448-7822



When a sanitary solution is the only solution.

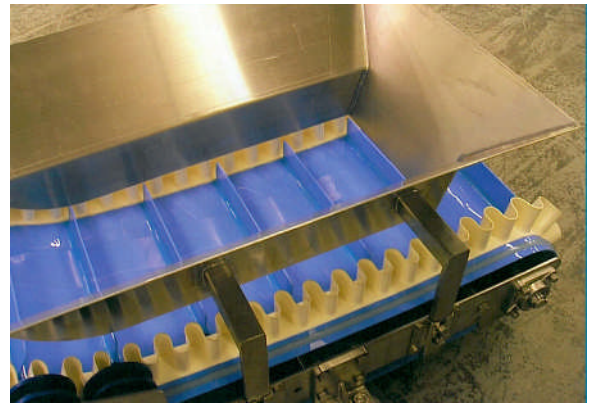

Belts & Surfaces

Cleated Incline Chemical/Oil/Cut Resistant
 Indexing Dewatering
 Accumulation
 USDA- FDA Meat, Poultry & Dairy Belts

Frame:

304 SS Central Tube

Conveyor Idlers:

Fixed-Slider
 Bushing Style
 Bearing Style

Bearings:

Double-seal, sealed for life ball bearings.

Supports: Several styles to choose from including Portable and fixed Sanitary Style Legs. Ceiling hangers & custom supports.

Drive Configurations: Multiple drive locations including top mount, side mount, bottom mount, shaft offset mount. Direct Belt Drive Can Push a direct drive belt. Epoxy Painted & Stainless Motor/Reducers available.

Hoppers & Side Leaves: 3, 6 and 8 cu ft hoppers standard. 6" 12" and 18" Side leaves standard.


Drive Types: Gearmotor, parallel shaft and right angle drives are used. Multiple voltages, CE, NEMA frames are available.

Pulley: Sprocket- Direct Belt Drive,

Controls: Standard Nema Enclosures available w/ start/stop, e stop, indexing and variable speed controls

Model	Belt W"	Belt L "
SBM1224 to SBM241200	12"	24" to 1200"
SBM1824 to SBM241200	18"	24" to 1200"
SBM2424 to SBM241800	24"	24" to 1800"
SBM3224 to SBM241800	32"	24" to 1800"
SBM3624 to SBM241800	36"	24" to 1800"
SBM4824 to SBM241800	48"	24" to 1800"
SBM6036 to SBM241800	60"	36" to 1800"

* Note: Any width can be accommodated in any Increment between 12" and 60". Conveyor length subject to belt live load requirements.

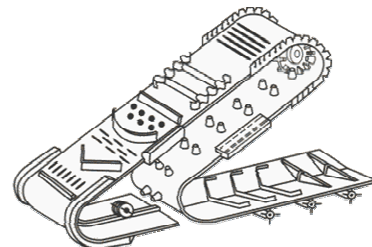

Multiple Belt Attachment Options

